

Products Catalogue 2024

PLUGS & CABLES



breneco

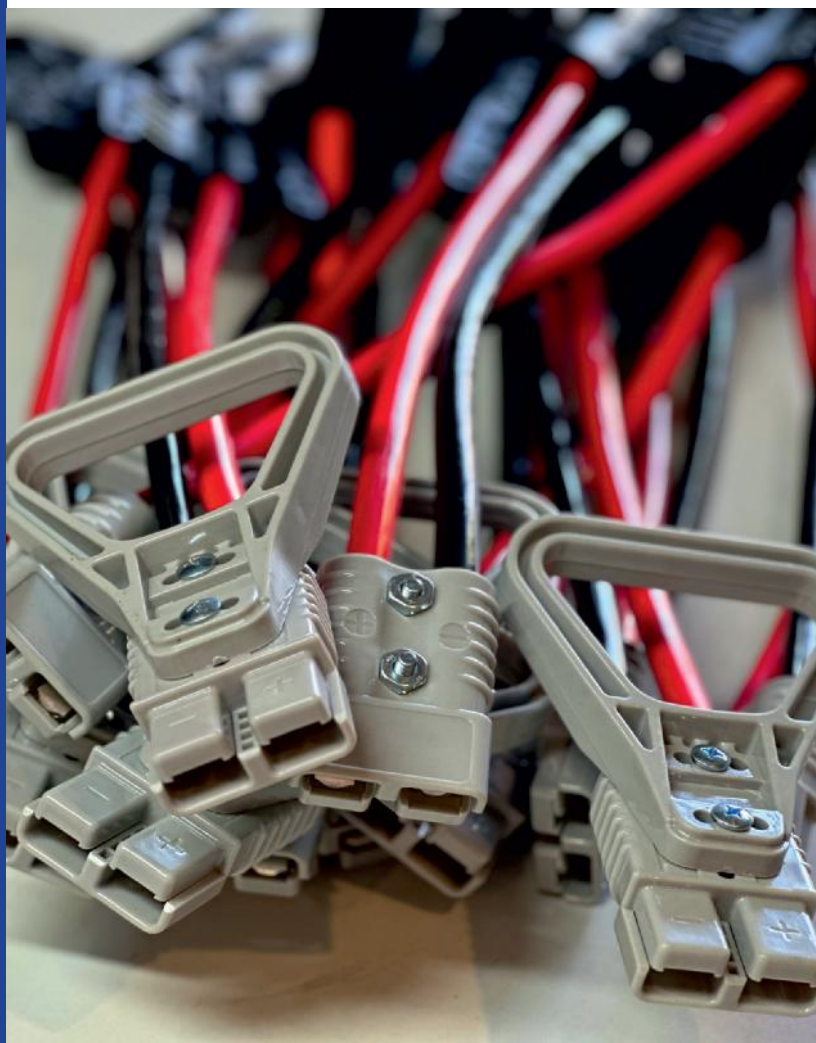


Table of Contents

ELECTRICAL PRODUCTS 12V

7-POL. ISO 1724	01
13-POL. ISO 11446	04


ELECTRICAL PRODUCTS 24V

7-POL. ISO 1185 "N"	09
7-POL. ISO 3731 "S"	14
ADAPTER 15/24 -> 7/24V "N" & 7/24V "S"	19
EBS ISO 7368-1	23
15-POL. ISO 12098	25
2-POL. 35mm ²	27
3-POL.	38
BATTERY SWITCH OFF	39

PNEUMATIC

COUPLINGS	40
AIR BRAKE COILS PU	44
AIR BRAKE COILS PA.....	45
TUBING PA12	46

7 POL. / 12V ISO 1724



Contact No.	Function	wire color	Designation to DIN 72552
1	left-hand direction indicator	yellow	1/L
2	rear fog light	blue	54G
3	common return	white	31
4	right-hand direction indicator	green	R
5	right marker, position, license plate light	brown	58R
6	brake lights	red	54
7	right marker, position, license plate light	black	58L



00519000-L

PLASTIC PLUG
screw contacts
two-piece



00511700-L / 00519700-L

PLASTIC PLUG
screw contacts
one-piece



00516700-L

METAL PLUG
screw contacts



00401700-L / 00421700-L

PLASTIC SOCKET
screw contacts



00431700-L

METAL SOCKET
screw contacts



00549700-L

PLASTIC SOCKET
screw contacts



00551000-L

ELECTRICAL CABLE
with plastic plugs


Working length
3,0 m
Cross section
6x1,0+1x1,5 mm ²



00551100-L

ELECTRICAL COIL
with plastic plugs

Working length
1,5m
Cross section
6x1,0+1x1,5 mm ²

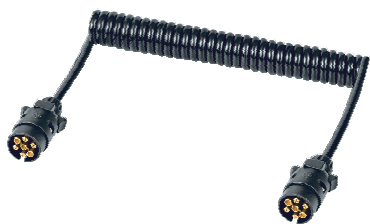

00551200-L

ELECTRICAL COIL
with plastic plugs

Working length
3,5m
Cross section
6x1,0+1x1,5 mm ²




00551300-L

ELECTRICAL COIL
with metal plugs

Working length
3,5m
Cross section
6x1,0+1x1,5 mm ²

13 POL. / 12V ISO 11446



Contact No.	Function	wire color	Designation to DIN 72552
1	left-hand direction indicator	yellow	1/L
2	rear fog light	blue	2/NS ew. 54G
3	common return	white	3/3I
4	right-hand direction indicator	green	4/R
5	right marker, position, license plate light	brown	5/58R
6	brake lights	red	6/54
7	right marker, position, license plate light	black	7/58L
8	reversing light	pink	8/RF
9	power supply (constant)	orange	9/30L
10	power supply controlled by ignition switch	grey	30g
11	common return for pin 10	white/black	-
12	test or future allocation	light grey	-
13	common return for pin no 9	white/red	13/3I




00421300-L

PLASTIC SOCKET
screw contacts



00511160-L


PLASTIC PLUG
screw contacts

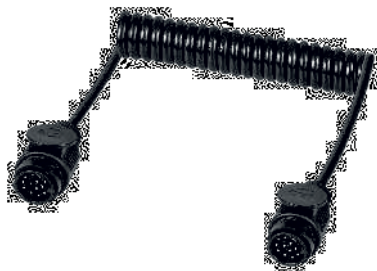

00551400-L

ELECTRICAL COIL
with plastic plugs

Working length
1,5m
Cross section
10x1,5+3x2,5 mm ²

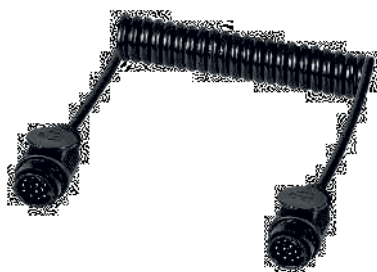

00551500-L

ELECTRICAL COIL
with plastic plugs


Working length
3,5m
Cross section
10x1,5+3x2,5 mm ²



00551600-L

ELECTRICAL COIL
with plastic plugs - 8-pol. contact version

Working length
1,5m
Cross section
7x0,75+1x1,5 mm ²

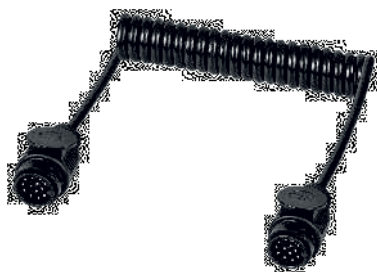

00551700-L

ELECTRICAL COIL
with plastic plugs - 8-pol. contact version

Working length
3,5m
Cross section
7x0,75+1x1,5 mm ²

7 POL / ISO 1724 & 13 POL ISO 11446



00421000-L

PLASTIC SOCKET
screw contacts



00560000-L

ADAPTOR
ISO 11446 -> ISO 1724



00554600-L

ADAPTOR
ISO 11446 -> ISO 1724



00560300-L

ADAPTOR
ISO 11446 -> ISO 1724

7 POL / ISO 1724 & 13 POL ISO 11446



00551800-L

CABLE ADAPTOR
ISO 11446 → ISO 1724



00551900-L

CABLE ADAPTOR
ISO 1724 → ISO 11446



00552000-L

ELECTRICAL COIL
with plastic plugs

Working length
3,5 m
Cross section
7x0,75+1x1,5 mm ²




00552100-L

ELECTRICAL COIL ISO 1185 - 24V → ISO 1724 12V
with metal plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²

7 POL / 24V ISO 1185 "N"



Contact No.	Funkcja Function Funktion	wire color	Designation to DIN 72552
1	common return	white	1/31
2	right marker, position, license plate light	black	2/58L
3	left-hand direction indicator	yellow	3/L
4	brake lights	red	4/54
5	right-hand direction indicator	green	5/R
6	right marker, position, license plate light	brown	6/58R
7	braking control for trailers	blue	-



00595100-L

PLASTIC PLUG
screw contacts




00590900-L

METAL PLUG
screw contacts



00585100-L

PLASTIC SOCKET
screw contacts



00580900-L

METAL SOCKET
screw contacts

00580700-L

METAL SOCKET
connector terminals



00552200-L

ELECTRICAL COIL
with plastic plugs

Working length
3,0 m
Cross section
6x1,0+1x1,5 mm ²



00521335-L / 00550870-L

ELECTRICAL COIL
with plastic plugs


Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00552300-L

ELECTRICAL COIL
with plastic plugs

Working length
4,0 m
Cross section
6x1,0+1x1,5 mm ²



00552400-L

ELECTRICAL COIL
with plastic plugs

Working length
4,5 m
Cross section
6x1,0+1x1,5 mm ²



00552500-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550890-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00552800-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00552900-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00550660-L

ELECTRICAL COIL
with metal plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550670-L

ELECTRICAL COIL
with metal plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00550680-L

ELECTRICAL COIL
with metal plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00550600-L

ELECTRICAL COIL
with metal plugs

Working length
4,5 m
Cross section
6x1,0+1x1,5 mm ²



00553000-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00552600-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00553100-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²




00553200-L

ELECTRICAL COIL


with metal plugs & metal springs as protection

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²

7 POL / 24V ISO 3731 "S"



Contact No.	Funkcja Function Funktion	wire color	Designation to DIN 72552
1	common return	white	1/31
2	reserved for future allocation	black	-
3	reversing light	yellow	3/30
4	permanent power supply	red	-
5	sensing device with common return	green	-
6	power supply controlled by ignition switch	brown	6/15
7	rear fog light	blue	-



00596100-L

PLASTIC PLUG
screw contacts




00591600-L

METAL PLUG
screw contacts



00586100-L

PLASTIC PLUG
screw contacts



00581600-L

METAL PLUG
screw contacts

00581100-L

METAL PLUG
connector terminals



00553300-L

ELECTRICAL COIL
with plastic plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550970-L / 00521435-L

ELECTRICAL COIL
with plastic plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00553400-L

ELECTRICAL COIL
with plastic plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



0055090-L

ELECTRICAL COIL
with plastic plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00553500-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550990-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00553600-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00553700-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00553800-L

ELECTRICAL COIL
with metal plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550770-L

ELECTRICAL COIL
with metal plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00553900-L

ELECTRICAL COIL
with metal plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00550700-L

ELECTRICAL COIL
with metal plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00554000-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00552700-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00554100-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²




00554200-L

ELECTRICAL COIL

with metal plugs & metal springs as protection


Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²

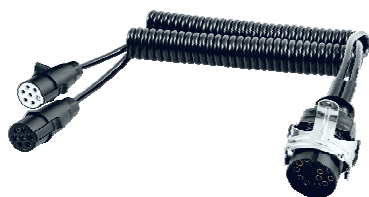

00555771-L

ADAPTER ELECTRICAL COIL
with plastic plugs


Working length
3,0 m
Cross section
2x6x1,0+1x1,5 mm ²

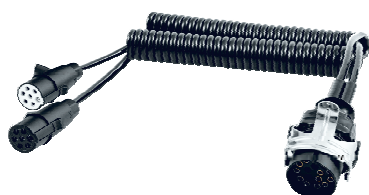

00555770-L / 00555773-L

ADAPTER ELECTRICAL COIL
with plastic plugs

Working length
3,5 m
Cross section
2x6x1,0+1x1,5 mm ²

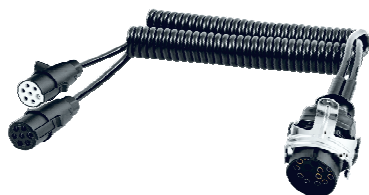

00555772-L

ADAPTER ELECTRICAL COIL
with plastic plugs

Working length
4,0 m
Cross section
2x6x1,0+1x1,5 mm ²



00555774-L

ADAPTER ELECTRICAL COIL
with plastic plugs

Working length
4,5 m
Cross section
2x6x1,0+1x1,5 mm ²



00554300-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,0m
Cross section
2x6x1,0+1x1,5 mm ²



00554400-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,5 m
Cross section
2x6x1,0+1x1,5 mm ²



00554500-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,0m
Cross section
2x6x1,0+1x1,5 mm ²



00554800-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,5 m
Cross section
2x6x1,0+1x1,5 mm ²



00555500-L

ADAPTER ELECTRICAL COIL
with metal plugs

Working length
3,0m
Cross section
2x6x1,0+1x1,5 mm ²



00521235-L

ADAPTER ELECTRICAL COIL
with metal plugs


Working length
3,5 m
Cross section
2x6x1,0+1x1,5 mm ²



00555600-L

ADAPTER ELECTRICAL COIL
with metal plugs

Working length
4,0m
Cross section
2x6x1,0+1x1,5 mm ²

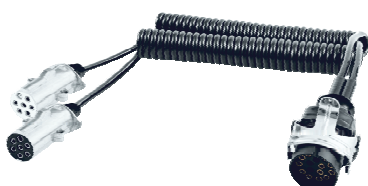

00555700-L

ADAPTER ELECTRICAL COIL
with metal plugs

Working length
4,5 m
Cross section
2x6x1,0+1x1,5 mm ²



00560200-L / 00554700-L

ADAPTER SHORT 15-pol / 24 -> 7/24V "N" & 7/24V "S"



00560400-L

ADAPTER SHORT 15-pol / 24 -> 7/24V "N" & 7/24V "S"



00560500-L


ADAPTER SHORT 15-pol / 24 -> 7/24V "N" & 7/24V "S"



00584100-L

ADAPTER SHORT 15-pol / 24 -> 7/24V "N" & 7/24V "S"

EBS / 24V ISO 7638-1



Contact No.	Function	wire color	Designation to DIN 72552
1	Plus electric control valves	red	30
2	Plus electronics	black	15
3	Minus electronics	yellow	31
4	Minus electric control valves	brown	31
5	Warning system	white	-
6	Data exchange CAN H	white-green	-
7	Data exchange CAN L	white-brown	-



00594870-L

PLUGS EBS-24V
screw contacts



00595770-L

PLUGS EBS-24V
crimp contacts



00425470-L / 00583900-L
00583970-L / 00584170-L

SOCKET EBS-24V
screw contacts



00585770-L / 00586970-L

SOCKET EBS-24V
crimp contacts



00521030-L

ELECTRICAL COIL EBS 24V

Working length
3,0 m
Cross section
2x1,5 + 2x4,0 + 3x1,5 mm ²



00521035-L / 00558700-L

ELECTRICAL COIL EBS 24V

Working length
3,5 m
Cross section
2x1,5 + 2x4,0 + 3x1,5 mm ²



00558785-L

ELECTRICAL COIL EBS 24V

Working length
4,0m
Cross section
2x1,5 + 2x4,0 + 3x1,5 mm ²



00557400-L / 00558400-L

ELECTRICAL COIL EBS 24V

Working length
4,5 m
Cross section
2x1,5 + 2x4,0 + 3x1,5 mm ²



Contact No	Function	wire color	Designation to DIN 72552
1	Left-hand direction indicator light	yellow	1/L
2	Right-hand direction indicator light	green	2/R
3	Rear fog light	blue	-
4	Common return	white	3I
5	Left-hand rear, position, and marker lights, and license plate lamp	black	5/58L
6	Right-hand rear, position, and marker lights, and license plate lamp	brown	6/58R
7	Brake lights	red	7/54
8	Reversing light	pink	-
9	Continuous power supply (steady, constant)	orange	30
10	Reverse lock release for inertia brake and locking of steering axle	grey	-
11	Starting-traction control system	black-white	-
12	Axle lifting device	blue-white	-
13	Common return for data lines	white-red	3I
14	CAN-H (not for ABS/EBS)	green-white	-
15	CAN-L (not for ABS/EBS)	brown-white	-



00594670-L

PLUG 15-POL. 24V
screw contacts



00594570-L

PLUG 15-POL. 24V
crimp contacts



00584370-L / 00584200-L / 00584300-L

SOCKET 15-POL. 24V
screw contacts



00584500-L

SOCKET 15-POL. 24V
crimp contacts



00559100-L

ELECTRICAL COIL 15-POL. 24V

Working length
3,0 m
Cross section
10x1,5 + 3x2,5 + 2x1,5 mm ²



00521135-L / 00559170-L

ELECTRICAL COIL 15-POL. 24V

Working length
3,5 m
Cross section
10x1,5 + 3x2,5 + 2x1,5 mm ²



00559685-L

ELECTRICAL COIL 15-POL. 24V

Working length
4,0 m
Cross section
10x1,5 + 3x2,5 + 2x1,5 mm ²



00559070-L

ELECTRICAL COIL 15-POL. 24V

Working length
4,5 m
Cross section
10x1,5 + 3x2,5 + 2x1,5 mm ²



00559200-L

PLUG 2-POL.
green with nut




00559300-L

PLUG 2-POL.
black with nut



00559400-L

PLUG -POL.
green without nut



00559500-L

SOCKET 2-POL.



00559600-L

ELECTRICAL COIL 2-POL. without plugs

Working length
3,0 m
Cross section
2 x 35 mm ²



00559700-L

ELECTRICAL COIL 2-POL. without plugs

Working length
3,5 m
Cross section
2 x 35 mm ²



00559800-L

ELECTRICAL COIL 2-POL. without plugs

Working length
4,0 m
Cross section
2 x 35 mm ²



00559900-L

ELECTRICAL COIL 2-POL. without plugs

Working length
4,0 m
Cross section
2 x 35 mm ²



00512600-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
3,5 m
Cross section
2 x 35 mm ²



00512900-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
4,0 m
Cross section
2 x 35 mm ²



00513200-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
4,5 m
Cross section
2 x 35 mm ²



00513500-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
5,0 m
Cross section
2 x 35 mm ²



00512610-L

ELECTRICAL COIL 2-POL. black plugs with nut

Working length
3,5 m
Cross section
2 x 35 mm ²



00512910-L

ELECTRICAL COIL 2-POL. black plugs with nut

Working length
4,0 m
Cross section
2 x 35 mm ²



00513210-L

ELECTRICAL COIL 2-POL. black plugs with nut

Working length
4,5 m
Cross section
2 x 35 mm ²



00513510-L

ELECTRICAL COIL 2-POL. black plugs with nut

Working length
5,0 m
Cross section
2 x 35 mm ²



00512620-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
3,5 m
Cross section
2 x 35 mm ²



00512920-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
4,0 m
Cross section
2 x 35 mm ²



00513220-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
4,5 m
Cross section
2 x 35 mm ²



00513520-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
5,0 m
Cross section
2 x 35 mm ²



00513600-L

PLUG 2-POL. 35-50 mm²
soldered contacts

00513700-L

PLUG 2-POL. 35 mm²
screw contacts

00513800-L

PLUG 2-POL. 50 mm²
screw contacts

00513900-L

PLUG 2-POL. 35 mm²
crimp contacts

00514000-L

PLUG 2-POL. 50 mm²
crimp contacts



00514100-L

SOCKET 35-50 mm²
soldered contacts

00514200-L

SOCKET 35 mm²
screw contacts

00514300-L

SOCKET 50 mm²
screw contacts

00514400-L

SOCKET 35 mm²
crimp contacts

00514500-L


SOCKET 50 mm²
crimp contacts



00514600-L

ELECTRICAL CABLE 2-POL. black flat p

Working length
3,0 m
Cross section
2 x 35 mm ²

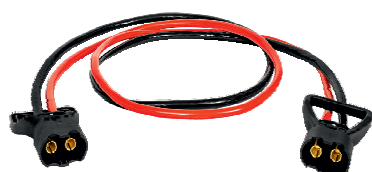

00514700-L

ELECTRICAL CABLE 2-POL. black flat p

Working length
4,5 m
Cross section
2 x 35 mm ²



00514800-L

ELECTRICAL COIL 2-POL. black flat p

Working length
3,5 m
Cross section
2 x 35 mm ²



00514900-L

ELECTRICAL COIL 2-POL. black flat p

Working length
4,5 m
Cross section
2 x 35 mm ²



00515000-L

PLUG 2-POL. GREY 50A

00515100-L

PLUG 2-POL. GREY 175A


00515200-L

PLUG 2-POL. GREY 320A



00515300-L

PLUG 2-POL. GREY 175A-SBX



HANDLE FOR PLUG 2-POL. GREY




00515400-L

CABLE 2x35mm² 3,5M with 2-POL. PLUGS 175A



00515500-L

ELECTRICAL COIL 2x35mm² 3,5M with 2-POL. PLUGS 175A



00515600-L

SOCKET 35mm²




00515700-L

ELECTRICAL COIL 2x35mm² 3,5M with 2-POL. PLUGS 175A-SBX



00515800-L

PLUG 2 POL.
crimp contacts

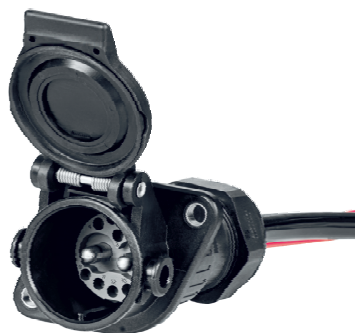

00515900-L

SOCKET 2 POL.
crimp contacts



00516000-L

ELECTRICAL COIL 2-POL.

Working length
3,5m
Cross section
2 x 35 mm ²



00516100-L


ELECTRICAL COIL 2-POL.

Working length
4,5 m
Cross section
2 x 35 mm ²



00516200-L

METAL PLUG 3-POL.
screw contacts

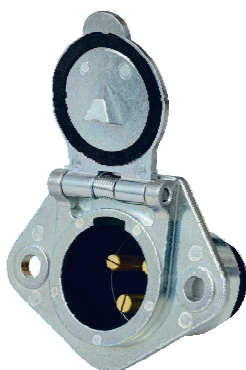

00516300-L


METAL SOCKET 3-POL.
screw contacts



00516400-L

ELECTRICAL COIL WITHOUT PLUGS

Working length
3,5 m
Cross section
3 x 6 mm ²

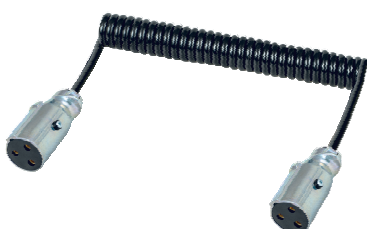

00516500-L

ELECTRICAL COIL 3-POL.

Working length
3,5 m
Cross section
3 x 6 mm ²



00516600-L

ELECTRICAL COIL 3-POL.

Working length
3,5 m
Cross section
3 x 6 mm ²



00516800-L

BATTERY SWITCH OFF 12/24V 250A



00516900-L

BATTERY SWITCH OFF 12/24V 3 x 250A (3sec) IVECO



00517000-L

BATTERY SWITCH OFF 12/24V 500A M8



00517100-L

BATTERY SWITCH OFF 12/24V 500A M10



00517200-L

BATTERY SWITCH OFF 12/24V 2 x M10 1200A




00517300-L

BATTERY SWITCH OFF 12/24V 100A




00517400-L

BATTERY SWITCH OFF 24V 300A




Art. No.	color	type	
PH-01-Y-M16x1,5	yellow	STANDARD	M16x1,5
PH-01-Y-M22x1,5	yellow	STANDARD	M22x1,5
PH-01-Y-1/2BSP	yellow	STANDARD	1/2 BSP




Art. No.	color	type	
PH-01-R-M16x1,5	red	STANDARD	M16x1,5
PH-01-R-M22x1,5	red	STANDARD	M22x1,5
PH-01-R-1/2BSP	red	STANDARD	1/2 BSP




Art. No.	description
PH-01-GASKET	rubber Gasket




Art. No.	color	type	
PH-02-Y-M16x1,5	yellow	AUTOMATIC	M16x1,5
PH-02-Y-M22x1,5	yellow	AUTOMATIC	M22x1,5



Art. No.	color	type	
PH-02-R-M16x1,5	red	AUTOMATIC	M16x1,5
PH-02-R-M22x1,5	red	AUTOMATIC	M22x1,5




Art. No.	color	type	
PH-03-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5
PH-03-Y-M22x1,5	yellow	STANDARD with LINE FILTER	M22x1,5




Art. No.	color	type	
PH-03-R-M16x1,5	red	STANDARD with LINE FILTER	M16x1,5
PH-03-R-M22x1,5	red	STANDARD with LINE FILTER	M22x1,5



Art. No.	description
PH-02 GASKET	Rubber Gasket




Art. No.	color	type	
PH-04-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5
PH-04-Y-M22x1,5	yellow	STANDARD with LINE FILTER	M22x1,5



Art. No.	color	type	
PH-04-R-M16x1,5	red	STANDARD with LINE FILTER	M16x1,5
PH-04-R-M22x1,5	red	STANDARD with LINE FILTER	M22x1,5



Art. No.	color	type	
PH-05-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5
PH-05-Y-M22x1,5	yellow	STANDARD with LINE FILTER	M22x1,5



Art. No.	color	type	
PH-05-R-M16x1,5	red	STANDARD with LINE FILTER	M16x1,5
PH-05-R-M22x1,5	red	STANDARD with LINE FILTER	M22x1,5



Art. No.	color	type	
PH-06-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5



Art. No.	color	type	
PH-09-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5



Art. No.	color	length	
PC-13-20-2-22	yellow	4,0M	2 x M16x1,5
PC-13-20-2-25	yellow	4,5M	2 x M16x1,5



Art. No.	color	length	
PC-12-20-2-22	red	4,0M	2 x M16x1,5
PC-12-20-2-25	red	4,5M	2 x M16x1,5



Art. No.	color	length	
PC-11-13-2-22	black with yellow sleeve	4,0M	2 x M16x1,5
PC-11-13-2-25	black with yellow sleeve	4,5M	2 x M16x1,5



Art. No.			
PC-11-12-2-22	black with red sleeve	4,0M	2 x M16x1,5
PC-11-12-2-25	black with red sleeve	4,5M	2 x M16x1,5



Art. No.	color	length	
PC-01-13-2-16	black with yellow sleeve	4,5 M	2 x M16x1,5
PC-01-13-2-22	black with yellow sleeve	5,5M	2 x M16x1,5
PC-01-13-3-16	black with yellow sleeve	4,5 M	2 x M22x1,5
PC-01-13-3-22	black with yellow sleeve	5,5M	2 x M22x1,5



Art. No.	color	length	
PC-01-12-2-16	black with red sleeve	4,5 M	2 x M16x1,5
PC-01-12-2-22	black with red sleeve	5,5M	2 x M16x1,5
PC-01-12-3-16	black with red sleeve	4,5 M	2 x M22x1,5
PC-01-12-3-22	black with red sleeve	5,5M	2 x M22x1,5



DIN 74324 / 73378						
Part No.	outer diameter		inner diameter		min wall thickness	tube pressure range PA 12 PHL
	mm	tolerance	mm	tolerance		Pr [bar]
PT-4x1-025	4	±0,10	2	±0,2	0,90	44
PT-4x1-100	4	±0,10	2		0,90	44
PT-6x1-025	6	±0,10	4		0,90	27
PT-6x1-100	6	±0,10	4		0,90	27
PT-8x1-025	8	±0,10	6		0,90	19
PP-8x1-100	8	±0,10	6		0,90	19
PT-10x1-025	10	±0,10	8		0,90	15
PT-10x1-100	10	±0,10	8		0,90	15
PT-10x1,5-025	10	±0,15	7	±0,3	1,35	19
PT-10x1,5-100	10	±0,15	7		1,35	19
PT-12x1,5-025	12	±0,15	9		1,35	19
PT-12x1,5-100	12	±0,15	9		1,35	19
PT-15x1,5-025	15	±0,15	12		1,35	15
PT-15x1,5-100	15	±0,15	12		1,35	15
PT-16x2-025	16	±0,15	12		1,80	19
PT-16x2-050	16	±0,15	12		1,80	19
PT-18x2-025	18	±0,15	14		1,80	17
PT-18x2-050	18	±0,15	14		1,80	17

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.