

Products Catalogue 2024



breneco

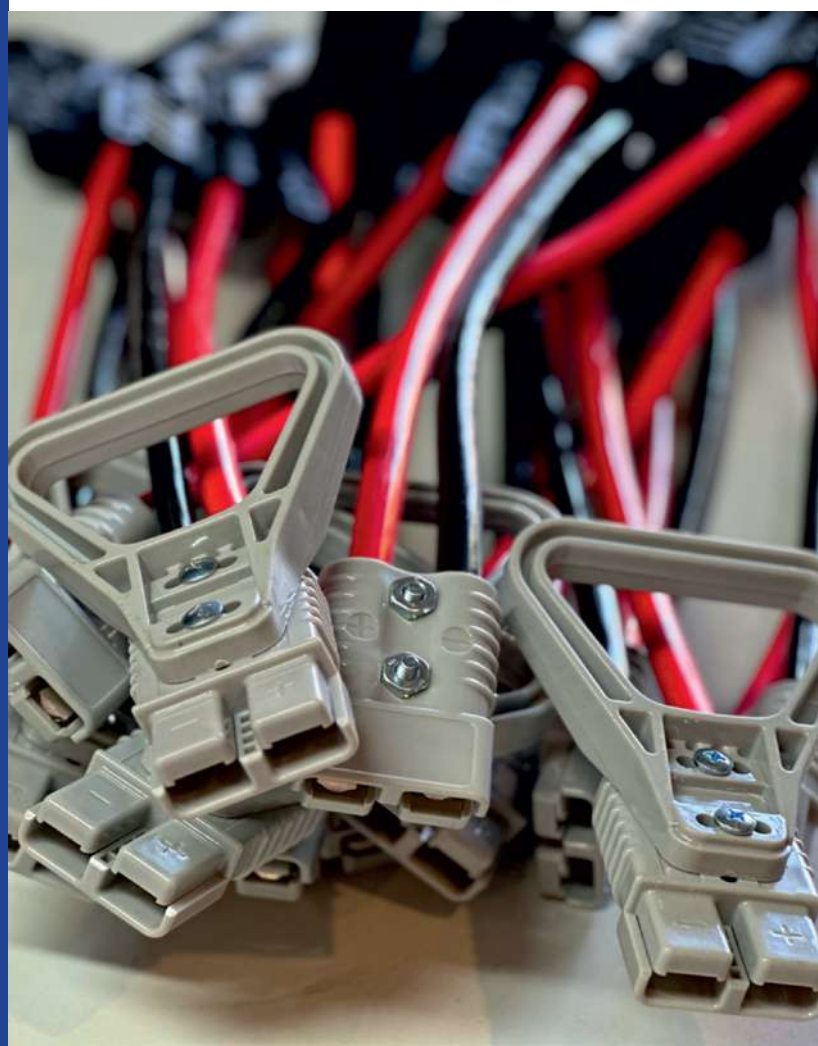


Table of Contents

ELECTRICAL PRODUCTS 12V

7-POL. ISO 1724	01
13-POL. ISO 11446	04


ELECTRICAL PRODUCTS 24V

7-POL. ISO 1185 "N"	08
7-POL. ISO 3731 "S"	13
ADAPTER 15/24 -> 7/24V "N" & 7/24V "S".....	18
EBS ISO 7368-1	22
15-POL. ISO 12098	24
2-POL. 35mm ²	26
3-POL.	37
BATTERY SWITCH OFF	38

PNEUMATIC

COUPLINGS	40
AIR BRAKE COILS PU	43
AIR BRAKE COILS PA.....	44
TUBING PA12	45

7 POL. / 12V ISO 1724



Contact No.	Function	wire color	Designation to DIN 72552
1	left-hand direction indicator	yellow	1/L
2	rear fog light	blue	54G
3	common return	white	31
4	right-hand direction indicator	green	R
5	right marker, position, license plate light	brown	58R
6	brake lights	red	54
7	right marker, position, license plate light	black	58L



00519000-L

PLASTIC PLUG

screw contacts
two-piece



00511700-L / 00519700-L

PLASTIC PLUG

screw contacts
one-piece



00516700-L

METAL PLUG

screw contacts



00401700-L / 00421700-L

PLASTIC SOCKET
screw contacts



00431700-L

METAL SOCKET
screw contacts



00549700-L

PLASTIC SOCKET
screw contacts

00551000-L



ELECTRICAL CABLE
with plastic plugs

Working length
3,0 m
Cross section
6x1,0+1x1,5 mm ²

00551100-L



ELECTRICAL COIL
with plastic plugs

Working length
1,5m
Cross section
6x1,0+1x1,5 mm ²


00551200-L



ELECTRICAL COIL
with plastic plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²


00551300-L

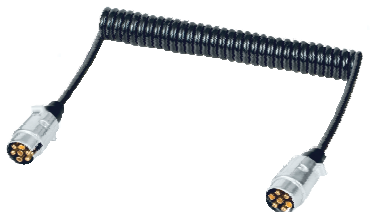

ELECTRICAL COIL
with metal plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²

13 POL. / 12V ISO 11446



Contact No.	Function	wire color	Designation to DIN 72552
1	left-hand direction indicator	yellow	1/L
2	rear fog light	blue	2/NS ew. 54G
3	common return	white	3/3I
4	right-hand direction indicator	green	4/R
5	right marker, position, license plate light	brown	5/58R
6	brake lights	red	6/54
7	right marker, position, license plate light	black	7/58L
8	reversing light	pink	8/RF
9	power supply (constant)	orange	9/30L
10	power supply controlled by ignition switch	grey	30g
11	common return for pin 10	white/black	-
12	test or future allocation	light grey	-
13	common return for pin no 9	white/red	13/3I



00421300-L

PLASTIC SOCKET
screw contacts



00511160-L

PLASTIC PLUG
screw contacts



00551400-L

ELECTRICAL COIL
with plastic plugs

Working length
1,5m
Cross section
10x1,5+3x2,5 mm ²



00551500-L

ELECTRICAL COIL
with plastic plugs

Working length
3,5m
Cross section
10x1,5+3x2,5 mm ²



00551600-L

ELECTRICAL COIL
with plastic plugs - 8-pol. contact version

Working length
1,5m
Cross section
7x0,75+1x1,5 mm ²



00551700-L

ELECTRICAL COIL
with plastic plugs - 8-pol. contact version

Working length
3,5m
Cross section
7x0,75+1x1,5 mm ²

7 POL / ISO 1724 & 13 POL ISO 11446



00421000-L

PLASTIC SOCKET
screw contacts



00560000-L

ADAPTOR
ISO 11446 -> ISO 1724



00554600-L

ADAPTOR
ISO 11446 -> ISO 1724



00560300-L

ADAPTOR
ISO 11446 -> ISO 1724

7 POL / ISO 1724 & 13 POL ISO 11446



00551800-L

CABLE ADAPTOR
ISO 11446 -> ISO 1724



00551900-L

CABLE ADAPTOR
ISO 1724 -> ISO 11446



00552000-L

ELECTRICAL COIL
with plastic plugs

Working length
3,5 m
Cross section
7x0,75+1x1,5 mm ²




00552100-L

ELECTRICAL COIL ISO 1185 - 24V -> ISO 1724 12V
with metal plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²

7 POL / 24V ISO 1185 "N"



Contact No.	Funkcija Function Funktion	wire color	Designation to DIN 72552
1	common return	white	1/31
2	right marker, position, license plate light	black	2/58L
3	left-hand direction indicator	yellow	3/L
4	brake lights	red	4/54
5	right-hand direction indicator	green	5/R
6	right marker, position, license plate light	brown	6/58R
7	braking control for trailers	blue	-



00595100-L

PLASTIC PLUG
screw contacts




00590900-L

METAL PLUG
screw contacts



00585100-L

PLASTIC SOCKET
screw contacts



00580900-L

METAL SOCKET
screw contacts

00580700-L


METAL SOCKET
connector terminals



00552200-L

ELECTRICAL COIL
with plastic plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00521335-L / 00550870-L

ELECTRICAL COIL
with plastic plugs

Working length
3,5m
Cross section
6x1,0+1x1,5 mm ²



00552300-L

ELECTRICAL COIL
with plastic plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00552400-L

ELECTRICAL COIL
with plastic plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00552500-L

ELECTRICAL COIL
with overmolded plugs


Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550890-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²

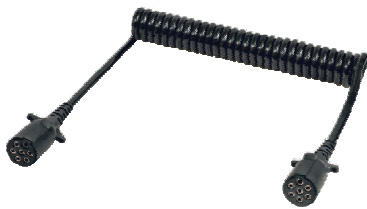

00552800-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00552900-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00550660-L

ELECTRICAL COIL
with metal plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550670-L

ELECTRICAL COIL
with metal plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00550680-L

ELECTRICAL COIL
with metal plugs


Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00550600-L

ELECTRICAL COIL
with metal plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²

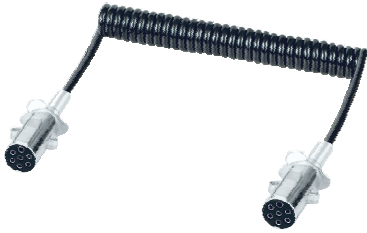


00553000-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²

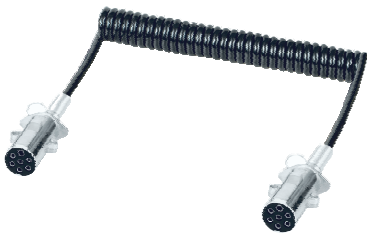

00552600-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00553100-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²




00553200-L

ELECTRICAL COIL


with metal plugs & metal springs as protection

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²

7 POL / 24V ISO 3731 "S"

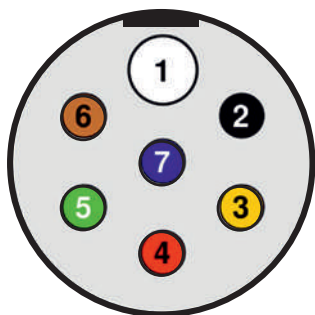

Contact No.	Funkcja Function Funktion	wire color	Designation to DIN 72552
1	common return	white	1/31
2	reserved for future allocation	black	-
3	reversing light	yellow	3/30
4	permanent power supply	red	-
5	sensing device with common return	green	-
6	power supply controlled by ignition switch	brown	6/15
7	rear fog light	blue	-

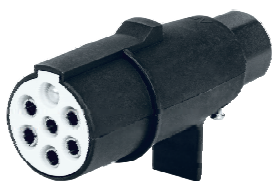

00596100-L

PLASTIC PLUG
screw contacts




00591600-L

METAL PLUG
screw contacts



00586100-L

PLASTIC PLUG
screw contacts



00581600-L

METAL PLUG
screw contacts

00581100-L

METAL PLUG
connector terminals



00553300-L

ELECTRICAL COIL
with plastic plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550970-L / 00521435-L

ELECTRICAL COIL
with plastic plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00553400-L

ELECTRICAL COIL
with plastic plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



0055090-L

ELECTRICAL COIL
with plastic plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00553500-L

ELECTRICAL COIL
with overmolded plugs


Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550990-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²

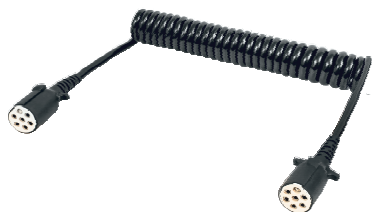

00553600-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00553700-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00553800-L

ELECTRICAL COIL
with metal plugs

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00550770-L

ELECTRICAL COIL
with metal plugs

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²



00553900-L

ELECTRICAL COIL
with metal plugs

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²



00550700-L

ELECTRICAL COIL
with metal plugs

Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²



00554000-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
3,0m
Cross section
6x1,0+1x1,5 mm ²



00552700-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
3,5 m
Cross section
6x1,0+1x1,5 mm ²




00554100-L

ELECTRICAL COIL

with metal plugs & metal springs as protection

Working length
4,0m
Cross section
6x1,0+1x1,5 mm ²

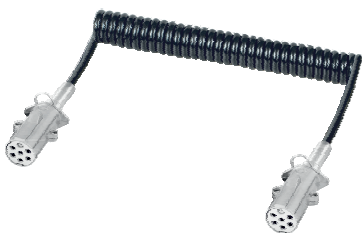


00554200-L

ELECTRICAL COIL

with metal plugs & metal springs as protection


Working length
4,5m
Cross section
6x1,0+1x1,5 mm ²

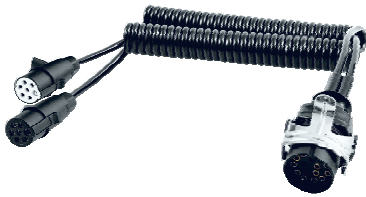

00555771-L

ADAPTER ELECTRICAL COIL
with plastic plugs

Working length
3,0m
Cross section
2x6x1,0+1x1,5 mm ²

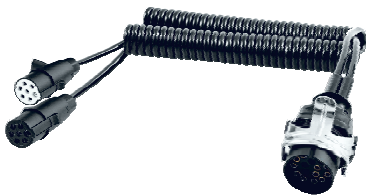

00555770-L / 00555773-L

ADAPTER ELECTRICAL COIL
with plastic plugs

Working length
3,5m
Cross section
2x6x1,0+1x1,5 mm ²



00555772-L

ADAPTER ELECTRICAL COIL
with plastic plugs

Working length
4,0m
Cross section
2x6x1,0+1x1,5 mm ²



00555774-L

ADAPTER ELECTRICAL COIL
with plastic plugs

Working length
4,5m
Cross section
2x6x1,0+1x1,5 mm ²



00554300-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,0m
Cross section
2x6x1,0+1x1,5 mm ²



00554400-L

ELECTRICAL COIL
with overmolded plugs

Working length
3,5 m
Cross section
2x6x1,0+1x1,5 mm ²



00554500-L

ELECTRICAL COIL
with overmolded plugs

Working length
4,0m
Cross section
2x6x1,0+1x1,5 mm ²



00554800-L

ELECTRICAL COIL
with overmolded plugs


Working length
4,5 m
Cross section
2x6x1,0+1x1,5 mm ²



00555500-L

ADAPTER ELECTRICAL COIL
with metal plugs

Working length
3,0m
Cross section
2x6x1,0+1x1,5 mm ²

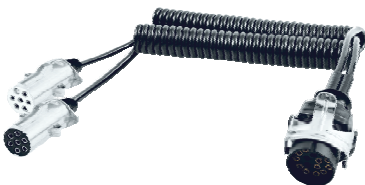

00521235-L

ADAPTER ELECTRICAL COIL
with metal plugs


Working length
3,5m
Cross section
2x6x1,0+1x1,5 mm ²



00555600-L

ADAPTER ELECTRICAL COIL
with metal plugs

Working length
4,0m
Cross section
2x6x1,0+1x1,5 mm ²

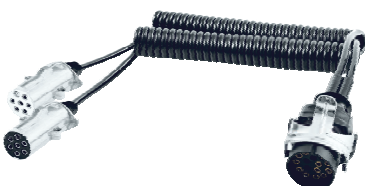

00555700-L

ADAPTER ELECTRICAL COIL
with metal plugs

Working length
4,5m
Cross section
2x6x1,0+1x1,5 mm ²



00560200-L / 00554700-L

ADAPTER SHORT 15-pol / 24 -> 7/24V "N" & 7/24V "S"



00560400-L

ADAPTER SHORT 15-pol / 24 -> 7/24V "N" & 7/24V "S"



00560500-L


ADAPTER SHORT 15-pol / 24 -> 7/24V "N" & 7/24V "S"



00584100-L

ADAPTER SHORT 15-pol / 24 -> 7/24V "N" & 7/24V "S"

EBS / 24V ISO 7638-1



Contact No.	Function	wire color	Designation to DIN 72552
1	Plus electric control valves	red	30
2	Plus electronics	black	15
3	Minus electronics	yellow	31
4	Minus electric control valves	brown	31
5	Warning system	white	-
6	Data exchange CAN H	white-green	-
7	Data exchange CAN L	white-brown	-



00594870-L

PLUGS EBS-24V
screw contacts



00595770-L

PLUGS EBS-24V
crimp contacts



00425470-L / 00583900-L
00583970-L / 00584170-L

SOCKET EBS-24V
screw contacts



00585770-L / 00586970-L

SOCKET EBS-24V
crimp contacts



00521030-L

ELECTRICAL COIL EBS 24V

Working length
3,0 m
Cross section
2x1,5 + 2x4,0 + 3x1,5 mm ²



00521035-L / 00558700-L

ELECTRICAL COIL EBS 24V

Working length
3,5 m
Cross section
2x1,5 + 2x4,0 + 3x1,5 mm ²



00558785-L

ELECTRICAL COIL EBS 24V

Working length
4,0m
Cross section
2x1,5 + 2x4,0 + 3x1,5 mm ²



00557400-L / 00558400-L

ELECTRICAL COIL EBS 24V

Working length
4,5 m
Cross section
2x1,5 + 2x4,0 + 3x1,5 mm ²



Contact No.	Function	wire color	Designation to DIN 72552
1	Left-hand direction indicator light	yellow	1/L
2	Right-hand direction indicator light	green	2/R
3	Rear fog light	blue	-
4	Common return	white	3I
5	Left-hand rear, position, and marker lights, and license plate lamp	black	5/5BL
6	Right-hand rear, position, and marker lights, and license plate lamp	brown	6/5BR
7	Brake lights	red	7/54
8	Reversing light	pink	-
9	Continuous power supply (steady, constant)	orange	30
10	Reverse lock release for inertia brake and locking of steering axle	grey	-
11	Starting-traction control system	black-white	-
12	Axle lifting device	blue-white	-
13	Common return for data lines	white-red	3I
14	CAN-H (not for ABS/EBS)	green-white	-
15	CAN-L (not for ABS/EBS)	brown-white	-



00594670-L

PLUG 15-POL. 24V
screw contacts



00594570-L

PLUG 15-POL. 24V
crimp contacts



00584370-L / 00584200-L / 00584300-L

SOCKET 15-POL. 24V
screw contacts



00584500-L

SOCKET 15-POL. 24V
crimp contacts



00559100-L

ELECTRICAL COIL 15-POL. 24V

Working length
3,0 m
Cross section
10x1,5 + 3x2,5 + 2x1,5 mm ²



00521135-L / 00559170-L

ELECTRICAL COIL 15-POL. 24V

Working length
3,5 m
Cross section
10x1,5 + 3x2,5 + 2x1,5 mm ²



00559685-L

ELECTRICAL COIL 15-POL. 24V

Working length
4,0 m
Cross section
10x1,5 + 3x2,5 + 2x1,5 mm ²



00559070-L

ELECTRICAL COIL 15-POL. 24V

Working length
4,5 m
Cross section
10x1,5 + 3x2,5 + 2x1,5 mm ²



00559200-L

PLUG 2-POL.
green with nut




00559300-L

PLUG 2-POL.
black with nut



00559400-L

PLUG -POL.
green without nut



00559500-L

SOCKET 2-POL.



00559600-L

ELECTRICAL COIL 2-POL. without plugs

Working length
3,0 m
Cross section
2 x 35 mm ²



00559700-L

ELECTRICAL COIL 2-POL. without plugs

Working length
3,5 m
Cross section
2 x 35 mm ²



00559800-L

ELECTRICAL COIL 2-POL. without plugs

Working length
4,0 m
Cross section
2 x 35 mm ²



00559900-L

ELECTRICAL COIL 2-POL. without plugs

Working length
4,0 m
Cross section
2 x 35 mm ²



00512600-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
3,5 m
Cross section
2 x 35 mm ²



00512900-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
4,0 m
Cross section
2 x 35 mm ²



00513200-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
4,5 m
Cross section
2 x 35 mm ²



00513500-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
5,0 m
Cross section
2 x 35 mm ²



00512610-L

ELECTRICAL COIL 2-POL. black plugs with nut

Working length
3,5 m
Cross section
2 x 35 mm ²



00512910-L

ELECTRICAL COIL 2-POL. black plugs with nut

Working length
4,0 m
Cross section
2 x 35 mm ²



00513210-L

ELECTRICAL COIL 2-POL. black plugs with nut

Working length
4,5 m
Cross section
2 x 35 mm ²



00513510-L

ELECTRICAL COIL 2-POL. black plugs with nut

Working length
5,0 m
Cross section
2 x 35 mm ²



00512620-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
3,5 m
Cross section
2 x 35 mm ²



00512920-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
4,0 m
Cross section
2 x 35 mm ²



00513220-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
4,5 m
Cross section
2 x 35 mm ²



00513520-L

ELECTRICAL COIL 2-POL. green plugs with nut

Working length
5,0 m
Cross section
2 x 35 mm ²



00513600-L

PLUG 2-POL. 35-50 mm²
soldered contacts

00513700-L

PLUG 2-POL. 35 mm²
screw contacts

00513800-L

PLUG 2-POL. 50 mm²
screw contacts

00513900-L

PLUG 2-POL. 35 mm²
crimp contacts

00514000-L

PLUG 2-POL. 50 mm²
crimp contacts

00514100-L

SOCKET 35-50 mm²
soldered contacts

00514200-L

SOCKET 35 mm²
screw contacts



00514300-L

SOCKET 50 mm²
screw contacts

00514400-L

SOCKET 35 mm²
crimp contacts

00514500-L

SOCKET 50 mm²
crimp contacts



00514600-L

ELECTRICAL CABLE 2-POL. black flat p

Working length
3,0 m
Cross section
2 x 35 mm ²



00514700-L

ELECTRICAL CABLE 2-POL. black flat p

Working length
4,5 m
Cross section
2 x 35 mm ²



00514800-L

ELECTRICAL COIL 2-POL. black flat p

Working length
3,5 m
Cross section
2 x 35 mm ²



00514900-L

ELECTRICAL COIL 2-POL. black flat p

Working length
4,5 m
Cross section
2 x 35 mm ²



00515000-L

PLUG 2-POL. GREY 50A

00515100-L

PLUG 2-POL. GREY 175A


00515200-L

PLUG 2-POL. GREY 320A



00515300-L

PLUG 2-POL. GREY 175A-SBX



HANDLE FOR PLUG 2-POL. GREY




00515400-L

CABLE 2x35mm² 3,5M with 2-POL. PLUGS 175A



00515500-L

ELECTRICAL COIL 2x35mm² 3,5M with 2-POL. PLUGS 175A



00515600-L

SOCKET 35mm²




00515700-L

ELECTRICAL COIL 2x35mm² 3,5M with 2-POL. PLUGS 175A-SBX



00515800-L

PLUG 2 POL.
crimp contacts

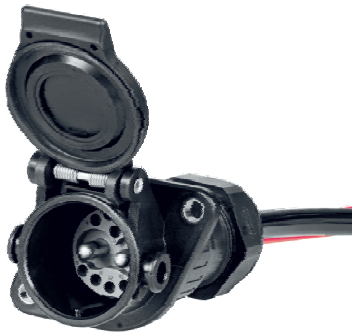

00515900-L

SOCKET 2 POL.
crimp contacts



00516000-L

ELECTRICAL COIL 2-POL.


Working length
3,5m
Cross section
2 x 35 mm ²



00516100-L


ELECTRICAL COIL 2-POL.

Working length
4,5 m
Cross section
2 x 35 mm ²




00516200-L

METAL PLUG 3-POL.
screw contacts

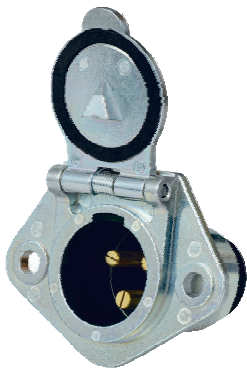

00516300-L


METAL SOCKET 3-POL.
screw contacts

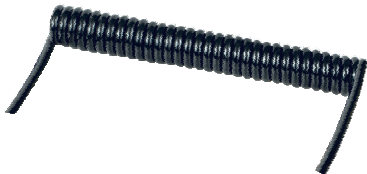

00516400-L

ELECTRICAL COIL WITHOUT PLUGS

Working length
3,5 m
Cross section
3 x 6 mm ²

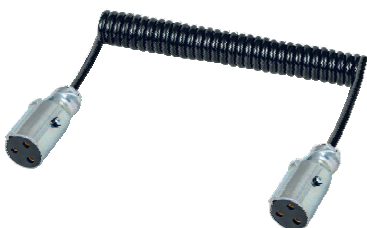

00516500-L

ELECTRICAL COIL 3-POL.

Working length
3,5 m
Cross section
3 x 6 mm ²



00516600-L

ELECTRICAL COIL 3-POL.

Working length
3,5 m
Cross section
3 x 6 mm ²



00516800-L

BATTERY SWITCH OFF 12/24V 250A



00516900-L

BATTERY SWITCH OFF 12/24V 3 x 250A (3sec) IVECO



00517000-L

BATTERY SWITCH OFF 12/24V 500A M8



00517100-L

BATTERY SWITCH OFF 12/24V 500A M10



00517200-L

BATTERY SWITCH OFF 12/24V 2 x M10 1200A




00517300-L

BATTERY SWITCH OFF 12/24V 100A




00517400-L

BATTERY SWITCH OFF 24V 300A




Art. No.	color	type	
PH-01-Y-M16x1,5	yellow	STANDARD	M16x1,5
PH-01-Y-M22x1,5	yellow	STANDARD	M22x1,5
PH-01-Y-1/2BSP	yellow	STANDARD	1/2 BSP




Art. No.	color	type	
PH-01-R-M16x1,5	red	STANDARD	M16x1,5
PH-01-R-M22x1,5	red	STANDARD	M22x1,5
PH-01-R-1/2BSP	red	STANDARD	1/2 BSP




Art. No.	description
PH-01-GASKET	rubber Gasket




Art. No.	color	type	
PH-02-Y-M16x1,5	yellow	AUTOMATIC	M16x1,5
PH-02-Y-M22x1,5	yellow	AUTOMATIC	M22x1,5



Art. No.	color	type	
PH-02-R-M16x1,5	red	AUTOMATIC	M16x1,5
PH-02-R-M22x1,5	red	AUTOMATIC	M22x1,5




Art. No.	color	type	
PH-03-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5
PH-03-Y-M22x1,5	yellow	STANDARD with LINE FILTER	M22x1,5




Art. No.	color	type	
PH-03-R-M16x1,5	red	STANDARD with LINE FILTER	M16x1,5
PH-03-R-M22x1,5	red	STANDARD with LINE FILTER	M22x1,5



Art. No.	description
PH-02 GASKET	Rubber Gasket




Art. No.	color	type	
PH-04-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5
PH-04-Y-M22x1,5	yellow	STANDARD with LINE FILTER	M22x1,5



Art. No.	color	type	
PH-04-R-M16x1,5	red	STANDARD with LINE FILTER	M16x1,5
PH-04-R-M22x1,5	red	STANDARD with LINE FILTER	M22x1,5



Art. No.	color	type	
PH-05-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5
PH-05-Y-M22x1,5	yellow	STANDARD with LINE FILTER	M22x1,5



Art. No.	color	type	
PH-05-R-M16x1,5	red	STANDARD with LINE FILTER	M16x1,5
PH-05-R-M22x1,5	red	STANDARD with LINE FILTER	M22x1,5



Art. No.	color	type	
PH-06-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5



Art. No.	color	type	
PH-09-Y-M16x1,5	yellow	STANDARD with LINE FILTER	M16x1,5



Art. No.	color	length	
PC-13-20-2-22	yellow	4,0M	2 x M16x1,5
PC-13-20-2-25	yellow	4,5M	2 x M16x1,5



Art. No.	color	length	
PC-12-20-2-22	red	4,0M	2 x M16x1,5
PC-12-20-2-25	red	4,5M	2 x M16x1,5



Art. No.	color	length	
PC-11-13-2-22	black with yellow sleeve	4,0M	2 x M16x1,5
PC-11-13-2-25	black with yellow sleeve	4,5M	2 x M16x1,5



Art. No.	color	length	
PC-11-12-2-22	black with red sleeve	4,0M	2 x M16x1,5
PC-11-12-2-25	black with red sleeve	4,5M	2 x M16x1,5



Art. No.	color	length	
PC-01-13-2-16	black with yellow sleeve	4,5 M	2 x M16x1,5
PC-01-13-2-22	black with yellow sleeve	5,5M	2 x M16x1,5
PC-01-13-3-16	black with yellow sleeve	4,5 M	2 x M22x1,5
PC-01-13-3-22	black with yellow sleeve	5,5M	2 x M22x1,5



Art. No.	color	length	
PC-01-12-2-16	black with red sleeve	4,5 M	2 x M16x1,5
PC-01-12-2-22	black with red sleeve	5,5M	2 x M16x1,5
PC-01-12-3-16	black with red sleeve	4,5 M	2 x M22x1,5
PC-01-12-3-22	black with red sleeve	5,5M	2 x M22x1,5



DIN 74324 / 73378						
Part No.	outer diameter		inner diameter		min wall thickness	tube pressure range PA 12 PHL
	mm	tolerance	mm	tolerance		Pr [bar]
PT-4x1-025	4	±0,10	2	±0,2	0,90	44
PT-4x1-100	4	±0,10	2		0,90	44
PT-6x1-025	6	±0,10	4		0,90	27
PT-6x1-100	6	±0,10	4		0,90	27
PT-8x1-025	8	±0,10	6		0,90	19
PP-8x1-100	8	±0,10	6		0,90	19
PT-10x1-025	10	±0,10	8		0,90	15
PT-10x1-100	10	±0,10	8		0,90	15
PT-10x1,5-025	10	±0,15	7	±0,3	1,35	19
PT-10x1,5-100	10	±0,15	7		1,35	19
PT-12x1,5-025	12	±0,15	9		1,35	19
PT-12x1,5-100	12	±0,15	9		1,35	19
PT-15x1,5-025	15	±0,15	12		1,35	15
PT-15x1,5-100	15	±0,15	12		1,35	15
PT-16x2-025	16	±0,15	12		1,80	19
PT-16x2-050	16	±0,15	12		1,80	19
PT-18x2-025	18	±0,15	14	1,80	17	
PT-18x2-050	18	±0,15	14	1,80	17	

